


PC-8, PC-10 PC-12 | PC-E8, PC-E10, PC-E12 | PC-E8R, PC-E10R, PC-E12R

Pre-condition for medium

芯紙調質輪

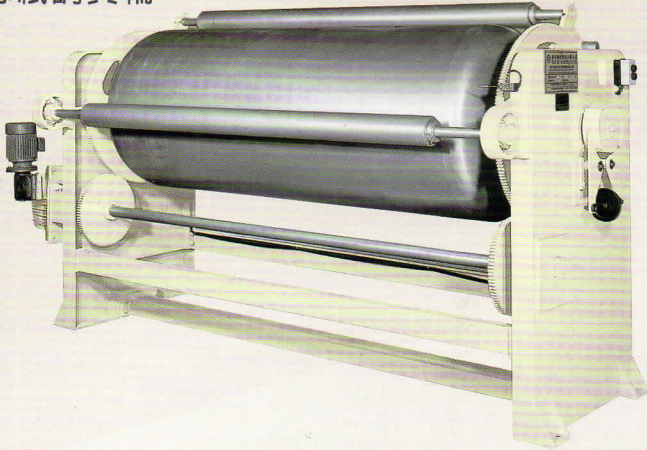

- The main function is improving humidity of medium paper and tension power use. There have three types:
- **PC-8, PC-10, PC-12**
Pre-heating roller diameter 800 mm ,1000 mm and 1200 mm. Pre-heating roller is one way free rotary. Paper's guide roller one is fixed, and the other one is on spring base.
- **PC-E8, PC-E10, PC-E12**
Pre-heating roller diameter 800 mm ,1000 mm and 1200 mm. Pre-heating roller is one way free rotary. Paper's guide roller one is traveling outside pre-heating roller, which the max. cover-angle can reach 210°, and the other one is on spring base.

- 本單元機器主要功能為改善芯紙溼度及張力使用。主要型式分為三種：
- **PC-8, PC-10, PC-12**
直徑 800mm、1000mm及1200mm，預熱輪為單向自由轉動，一支導紙輪為固定，另一支導紙輪裝於彈簧座上。
- **PC-E8, PC-E10, PC-E12**
直徑 800mm、1000mm及1200mm，預熱輪為單向自由轉動，一支導紙輪可於預熱輪外游動，其有效包覆角度最大可到210度，另一支導紙輪裝於彈簧座上。
- **PC-E8R, PC-E10R, PC-E12R**
直徑 800mm、1000mm及1200mm，預熱輪分為定速轉動或與單瓦機做同步轉動兩種，一支導紙輪可於預熱輪外游動，其有效包覆角度最大可到210度，另一支導紙輪裝於彈簧座上。
- 其組成要件為車壁、鋼製品預熱輪、導紙輪、煞車器等。
- 煞車型式分為手動煞車及氣動煞車兩種。
- **PC-E8R, PC-E10R, PC-E12R**
Pre-heating roller diameter 800 mm ,1000 mm and 1200 mm. Pre-heating roller divided to rotary at constant speed or rotary synchronous with Single Facer. Paper's guide roller one is traveling outside pre-heating roller, which the max. cover-angle can reach 210°, and the other one is on spring base.
- The main components are machine frame, pre-heating roller that made by steel, paper's guide roller, and brake etc.
- Brake has two types: manual brake and pneumatic brake.

PH-T8, PH-T10, PH-T12 | PH-T8R, PH-T10R, PH-T12R

Triplex Pre-Heater

三重預熱輪



PH-T8, PH-T10, PH-T12 三重預熱輪

- 預熱輪直徑：800mm、1000mm、及 1200mm--3支。
- 導紙轆三支固定，另三支可在預熱轆外圍游動旋轉。
- 導紙轆位置以電動調整。

PH-T8R, PH-T10R, PH-T12R 三重預熱輪(可旋轉式)

- 預熱輪直徑：800mm、1000mm、及 1200mm--3支。
- 導紙轆三支固定，另三支可在預熱轆外圍游動旋轉。
- 導紙轆位置以電動調整。
- 預熱輪可加裝減速機馬達傳動。
- 預熱輪可旋轉。

PH-T8, PH-T10, PH-T12 Triplex Pre-Heater

- Pre-heating roll diameter:800 mm,1000 mm,and 1200 mm --3 pcs.
- Paper's guide rollers 3 fixed, the other 3 rollers traveling upon outside pre-heating roll.

- The positing of paper's guide rollers adjusted by motorized.

PH-T8R, PH-T10R, PH-T12R Triplex Pre-Heater (Rotary Type)

- Pre-heating roll diameter :800 mm,1000mm,and 1200 mm --3 pcs.
- Paper's guide rollers 3 fixed, the other 3 rollers traveling upon outside pre-heating roll.

- The position of paper's guide rollers adjusted by motorized.

- Can add reduction motor to drive on pre-heating roller.

- Pre-heating roller can rotate.