

GU-D4(B)

GU-D5(B)

Double Glue Machine

雙層上糊機




- 糊輥表面經網目壓花及鍍鉻處理。
- 切糊輥表面經研磨及鍍鉻處理。
- 壓紙輥之昇降以氣壓控制。(亦可選擇使用彈簧壓板)。
- 本機器內裝有預熱輥。
- 糊輥與切糊輥與壓紙輥之間隙以電動微調，並附數值顯示。

- Surface of glue roll engraving and plated-Chrome treatment.
- Surface of doctor roll grinded and plated-Chrome treatment.
- Lift-Lower of pressure roll controlled by pneumatic. (Option : Contact bar)
- This machine with pre-heater roll.
- Gap between glue roll and doctor roll, glue roll and pressure roll by electric micro-adjustment and digital indication.

DR-5

Drive Roll Stand

驅動部

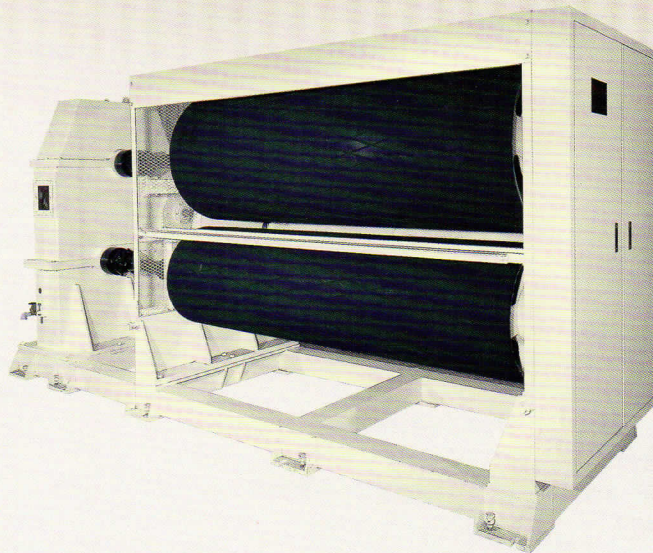

- 上驅動輥：直徑850 mm。
- 下驅動輥：直徑650 mm。
- 上、下驅動輥表面包覆耐磨耐高溫之合成橡膠，表面經研磨並加工成人字形，或包覆止滑皮帶。
- 上、下驅動輥之軸頭為可拆卸式，便於維修保養。
- 附獨立傳動齒輪箱（浸油式）。
- 齒輪箱經2支萬向接頭分別傳動上、下驅動輥。

- Upper drive roll: Dia. 850 mm.
- Lower drive roll: Dia. 650 mm.
- The surface of the drive roll is wrapped with non-slip belt / rubber.
- The shaft of upper and lower drive rolls are dischargeable. With this feature, it is very easy to maintain.
- Independent gear box: 1 unit.
- The drive rolls (upper & lower) are independent transported by universal joints.